

Final Exam
Course SCE1106 Control theory with
implementation (theory part)
Wednesday December 6, 2013
kl. 9.00-12.00
SKIP THIS PAGE AND REPLACE
WITH STANDARD EXAM FRONT
PAGE IN WORD FILE

November 4, 2014

Task 1 (20%): PID-control, the SIMC method

Consider a process described by the transfer function model

$$y = h_p(s)u. \quad (1)$$

The process are to be controlled by a controller of the form

$$u = h_c(s)(r - y). \quad (2)$$

The feedback control system is illustrated in Figure (1).

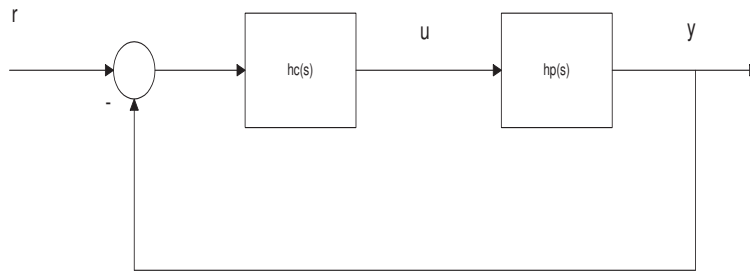


Figure 1: Standard feedback control system.

a) Consider the feedback control system in Figure (1).

- Find the transfer function from the reference, r , to the output measurement, y , i.e., find the transfer function

$$\frac{y}{r} = h_{ry}(s) \quad (3)$$

where $h_{ry}(s)$ is the transfer function from r to y .

- Find an expression for the transfer function, $h_c(s)$, for the controller as a function of the ratio $\frac{y}{r}$ and the transfer function for the process, $h_p(s)$.

We will in the following subtasks specify that the set point response from the reference, r , to the output, y , should be given by

$$\frac{y}{r} = \frac{e^{-\tau s}}{1 + T_c s} \quad (4)$$

where $T_c \geq \tau$ is a user specified time constant and $\tau > 0$ is the time delay. You may use the simple approximation $e^{-\tau s} \approx 1 - \tau s$ in the algebraic calculations when needed.

b) Given a process with a model as follows

$$y = h_p(s)u, \quad (5)$$

where

$$h_p(s) = k \frac{e^{-\tau s}}{(1 + T_1 s)(1 + T_2 s)(1 + T_3 s)(1 + T_4 s)}. \quad (6)$$

and where $T_1 > T_2 > T_3 > T_4 > 0$.

- Use the half rule for model reduction and formulate a 2nd order model approximation of the form

$$h_p(s) = k \frac{e^{-\tau s}}{(1 + T_1 s)(1 + T_2 s)}, \quad (7)$$

for the transfer function in Equation (6).

- Find the controller $h_c(s)$ by the SIMC (Skogestad) method. What type of controller is this?

c) Assume that the process, $h_p(s)$, is modelled by a 2nd order oscillating process of the form

$$h_p(s) = k \frac{e^{-\tau s}}{\tau_0^2 s^2 + 2\tau_0 \xi s + 1}. \quad (8)$$

- What are the definitions for the parameters ξ and τ_0 in in the model (8).
- When is the process oscillating ?
- Find the controller $h_c(s)$ by the SIMC (Skogestad) method.
- What type of controller is this?

d) What is the relationship between the poles in the system described by Eq. (8) and (7) for the following two cases:

- $\xi = 1$.
- $\xi > 1$.

e) Consider a system where there are no damping and where $\xi = 0$ in Eq. (8) such that the system can be described by

$$h_p(s) = k \frac{e^{-\tau s}}{\tau_0^2 s^2 + 1}. \quad (9)$$

- Find a controller by Skogestad method.
- What type of controller is this ?

Task 2 (8%): Frequency analysis

Given a feedback system as illustrated in Figure 2.

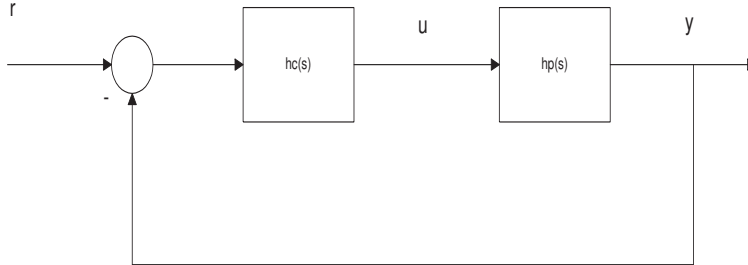


Figure 2: Standard feedback control system.

- a) Consider an PI controller, $h_c(s)$, and an integrating plus time delay process, $h_p(s)$, given by

$$h_c(s) = K_p \frac{1 + T_i s}{T_i s}, \quad h_p(s) = k \frac{e^{-\tau s}}{s}, \quad (10)$$

where K_p and T_i is the PI controller parameters, k is the gain velocity (slope of the integrator) and τ the time delay.

- Write down an expression for the loop transfer function, $h_0(s)$.
- b) Assume in this subtask 3b) that we use an approximation $e^{-\tau s} \approx 1$ for the time delay (same as neglecting the time delay in the model, Eq. (10)). The set-point response transfer function may then be written as

$$\frac{y}{r} = \frac{h_0}{\pi(s)} \quad (11)$$

where the characteristic polynomial $\pi(s)$ may be written on standard 2nd order form as follows

$$\pi(s) = \tau_0^2 s^2 + 2\zeta\tau_0 s + 1. \quad (12)$$

Here τ_0 is the response time and ζ the relative damping coefficient.

- Find expressions for the coefficients τ_0^2 and $2\zeta\tau_0$ in the characteristic polynomial Eq. (12) as a function of the PI controller parameters K_p , T_i and the gain velocity parameter k .
- Assume that we prescribe a unit relative damping, i.e. $\zeta = 1$. Find expressions for the PI controller parameters K_p and T_i as a function of a prescribed response time $\tau_0 > 0$.

Task 3 (16%): Frequency analysis

Given a system which can be described by a first order time delay model

$$h_p(s) = K \frac{e^{-\tau s}}{1 + Ts} \quad (13)$$

where $T > 0$ is the time constant and $\tau > 0$ the time delay.

- a) Answer the following: When can we approximate the model Eq. (13) as an integrating plus time delay model ?

$$h_p(s) = k \frac{e^{-\tau s}}{s} \quad (14)$$

Find an expression for the velocity gain (slope of integrator) k ?

- b)

Find an expression for the frequency response of the loop transfer function $h_0(s)$ found in subtask 3a), on polar form, i.e., such that

$$h_0(j\omega) = |h_0(j\omega)|e^{j\angle h_0(j\omega)}, \quad (15)$$

assuming a P-controller is used.

Find expressions for the magnitude $|h_0(j\omega)|$ and the phase angle $\angle h_0(j\omega)$.

Note: You should in this subtask 3c) use the integrator plus time delay model as in Eq. (10).

- c) Answer the following: Use a P controller and find the ultimate gain K_{cu} and the ultimate period $P_u = \frac{2\pi}{\omega_{180}}$.
- d) Answer the following: Show how you can estimate the model parameters k and τ in Eq. (14) from the ultimate gain K_{cu} and the ultimate period P_u . ?

Task 4 (12%): PID controller

Given a PID controller in the Laplace plane

$$h_c(s) = K_p \frac{1 + T_i s}{T_i s} + K_p T_d s = K_p + \frac{K_p}{T_i s} + K_p T_d s, \quad (16)$$

such that the control is generated by

$$u(s) = h_c(s)e(s) \quad (17)$$

where $e(s) = r - y(s)$ is the control error. We are assuming a constant reference signal, r , in this task.

- a) Write down a continuous state space model for the PID controller in Equations (16) and (17).
- b) Find a discrete time state space model for the PID controller in Step 4a) above.
Use the explicit Euler method for discretization.

c)

In this subtask you should use the explicit Euler method for discretization.

Find a discrete time PID controller in Step 4a) above on so called velocity (incremental, deviation) form, i.e. in such a way that the control is generated by the formula

$$u_k = u_{k-1} + g_0 e_k + g_1 e_{k-1} + g_2 (y_k - 2y_{k-1} + y_{k-2}). \quad (18)$$

You should also write down the expressions for the parameters g_0 , g_1 and g_2 .

Task 5 (4%): Smith Predictor

Given a system described by the following transfer function model

$$y = h_p(s)u + h_v(s)v \quad (19)$$

- a) Answer the following:
- When may it make sense to use a Smith predictor?
 - Sketch a block diagram of a system controlled by a Smith predictor.
 - Give a short description of the different elements in the Smith predictor.
- b) Find the transfer function from the reference r to the system output y .